


LK3245 series fan-and-filter

323x323mm | 1150-1350 m³/h






Colour	RAL7035,color can be customized
Protection category	IP54 standard, IP55 plus precision filter mat, IP56 plus precision filter mat and protective cover.

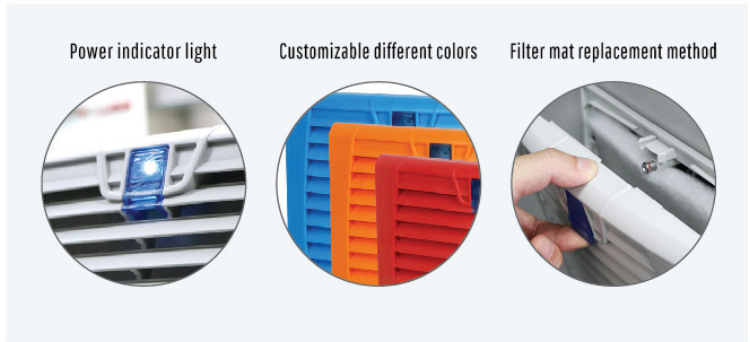

Dimensions

Exit filter LK 3243.300



Model No.fan-and-filter unit LK	3245.230-LK	3245.115-LK
Model No.fan-and-filter unit EMC	3245.230-EMC	3245.115-EMC
Rated operating voltage,frequency V,Hz	230V, 50/60Hz	115V, 50/60Hz
Air throughput,unimpeded air flow	1150-1350 m ³ /h	
Air throughput with Exit filter including standard filter mat	1 x LK 3243.300: 750-950 m ³ /h	
Axial fan	Capacitor operated	
Rated current max.	0.62-0.48 A	1.2-1.1 A
Rated Power	140.0-105.0 W	136.0-110.0 W
Noise level	63-65 dB(A)	
Operating temperature range	-30 - +70 °C	
Model No. Exit filter LK / EMC	3243.300 / 3243.300-EMC	
Design	Made of injection-moulded thermoplastic, customizable flame retardant materials, consistent with UL94-V0 self-extinguishing.	