




LK204.300




LK204.230



Dimensions

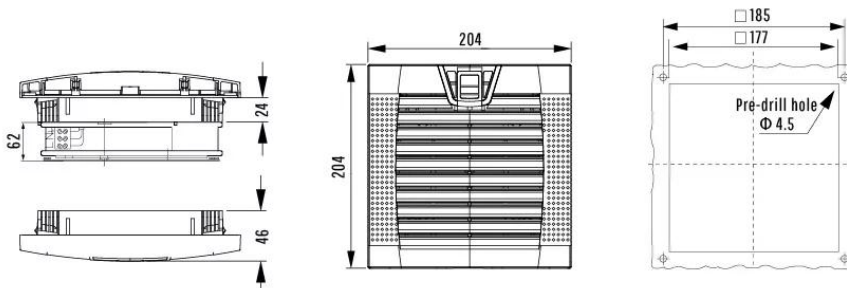

Characteristics of Static Pressure

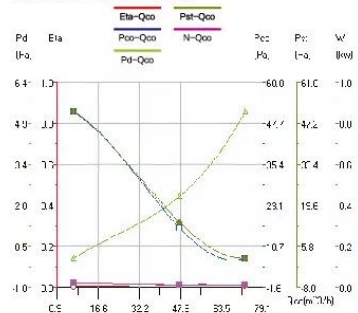

Model No.fan-and-filter unit LK	LK204.230	LK204.115	LK204.024
Rated operating voltage V	220V-240V	110V-120V	24V
Frequency Hz	50/60	50/60	-
Air throughput,unimpeded air flow	220/240m ³ /h	220/240m ³ /h	240m ³ /h
Air throughput with Exit filter including standard filter mat	1×LK204.300:155/185m ³ /h		
Axial fan	Self-starting shaded pole motor		DC motor
Rated current max.	0.24A/0.22A	0.48A/0.46A	0.58A
Rated Power	38/36W	38/36W	14W
Noise level	50/52dB(A)	50/52dB(A)	50dB(A)
Operating temperature range	-30 °C - +70 °C	-30 °C - +70 °C	-30 °C - +70 °C
Model No. Exit filter	LK204.300	LK204.300	LK204.300
Matching fan size	120×120,17251,162B fan can be installed		
Material	Made of injection-moulded thermoplastic, customizable flame retardant material (UL94-V0)		
Air flow direction	air-in as default; air-out optional		
Protection Level	IP54		