

LK254 series fan-and-filter




LK254.300




LK254.230



Dimensions

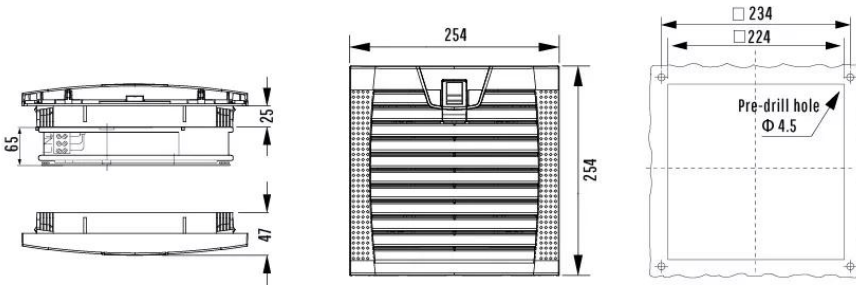

Characteristics of Static Pressure

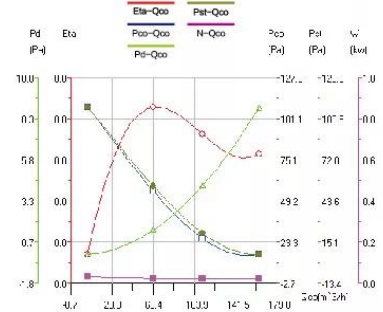

Model No. fan-and-filter unit LK	LK254.230	LK254.115
Rated operating voltage V	220V-240V	110V-120V
Frequency Hz	50/60	50/60
Air throughput,unimpeded air flow	230/265m³/h	230/265m³/h
Air throughput with Exit filter including standard filter mat	1×LK254.300:190/215m³/h	
Axial fan	Self-starting shaded pole motor	
Rated current max.	0.30A/0.28A	0.52A/0.5A
Rated Power	41/38W	41/38W
Noise level	50/52dB(A)	50/52dB(A)
Operating temperature range	-30 °C - +70 °C	-30 °C - +70 °C
Model No. Exit filter	LK254.300	LK254.300
Matching fan size	17251,1628,180×180,205×205 fan can be installed	
Material	Made of injection-moulded thermoplastic, customizable flame retardant material (UL94-V0)	
Air flow direction	air-in as default; air-out optional	
Protection Level	IP54	