




FK 8822

Filter material: ABS
Flame retardant grade: UL94-V0
IP level: IP54






FK8822.230

FK8822.300



Dimension

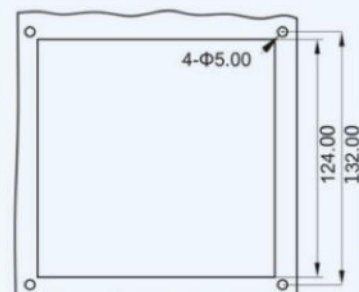

Model	FK8822.230		FK8822.115		FK8822.024	
Colour	RAL7035	RAL7032	RAL7035	RAL7032	RAL7035	RAL7032
Axial flow fan	120*120*38mm					
Rated voltage (v/Hz)	230V 50/60Hz		115V 50/60Hz		24V(DC)	
Air flow rate free blowing	55-56m³/h				55m³/h	
Air flow rate,equipped with outlet filter	1xFK8822.300:43/50m³/h					
Axial flow fan	Automatic shielded pole motor				DCmotor	
Rated current(A)	0.12/0.1		0.24/0.20		0.3	
Power(W)	19/14		18/15		7.2	
Noise level(bB)	50/52		50/52		50/52	
Operating temperature range	-10°C - +55°C		-10°C - +55°C		-10°C - +55°C	
Outlet filter model	FK8822.300		FK8822.300		FK8822.300	
Air flow direction	The default value is suction.if you need to exhaust air,add-P to the end of the model					