SMALL SUBMERSIBLE PUMPS

Little GIANT®

3E-12N SERIES - 1/15 HP

APPLICATIONS

Dual purpose oil-filled pump that may be used totally submersed or in-line (fed with pipe or hose). For commercial, industrial and home applications including statuary fountains, water displays, air conditioners, machine tool coolants, and many other applications where liquid must be transferred or recirculated.



3E-12N

1 ONE YEAR WARRANTY

FEATURES

- For submersed or in-line use
- Epoxy coated die-cast aluminum housing
- Oil-filled motor
- 17.3-foot maximum lift
- Screened inlet
- 1/2-inch MNPT discharge (accepts 3/4-inch I.D. tubing)
- Thermal overload protection


SERIES SPECIFICATIONS

Item No.	Model	Discharge	Intake	Listing(s)	HP	Volts	Hz	Amps	Watts	Gallons per hour (Liter per hour) @ Height				Shut-Off	PSI	Cord	Weight lbs (Kg)
										1′	3′	5′	10′				
503103	3E-12N	1/2" MNPT	1/2" FNPT	UL	1/15	115	60	3.2	200	500 (1893)	435 (1647)	337 (1276)	210 (795)	17.3′ (5.2 m)	7.5	6′ (1.8 m)	8 (3.62)
503186	3E-12NT	1/2" MNPT	1/2" FNPT	UL/CSA	1/15	115	60	3.2	200	500 (1893)	435 (1647)	337 (1276)	210 (795)	17.3′ (5.2 m)	7.5	10′ (3 m)	8.25 (3.74)


3E-12N SERIES - 1/15 HP

ENGINEERING DATA

Notation	Unit
Primary Measurement	in

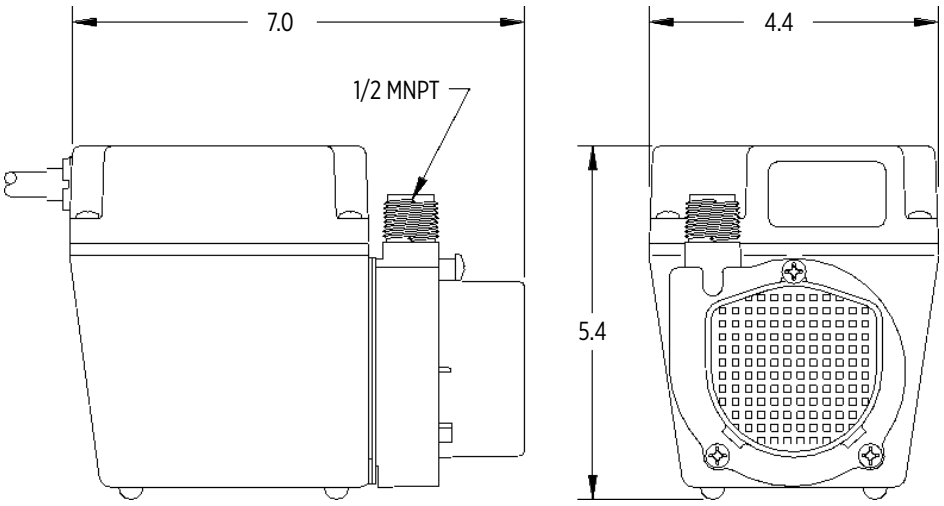

PERFORMANCE DATA

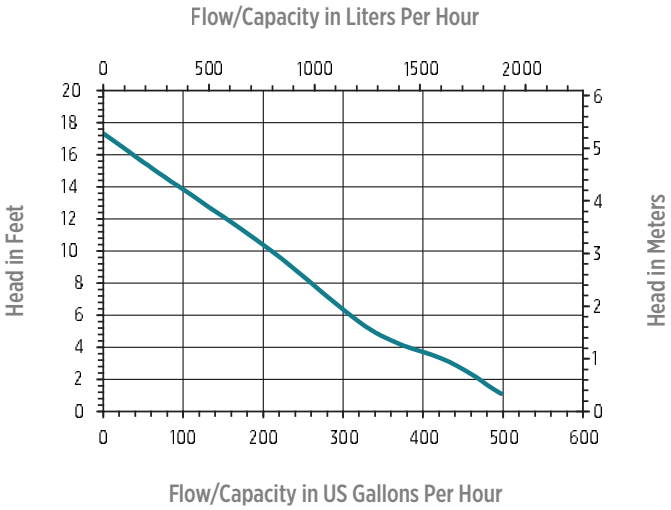

REPLACEMENT PARTS

Volute	103330 (103375, black)
Impeller	103437
Screen	102909 (102376, black)
Gasket	103601