



Curvas de Rendimiento a 3450 r.p.m.

2" DESCARGA

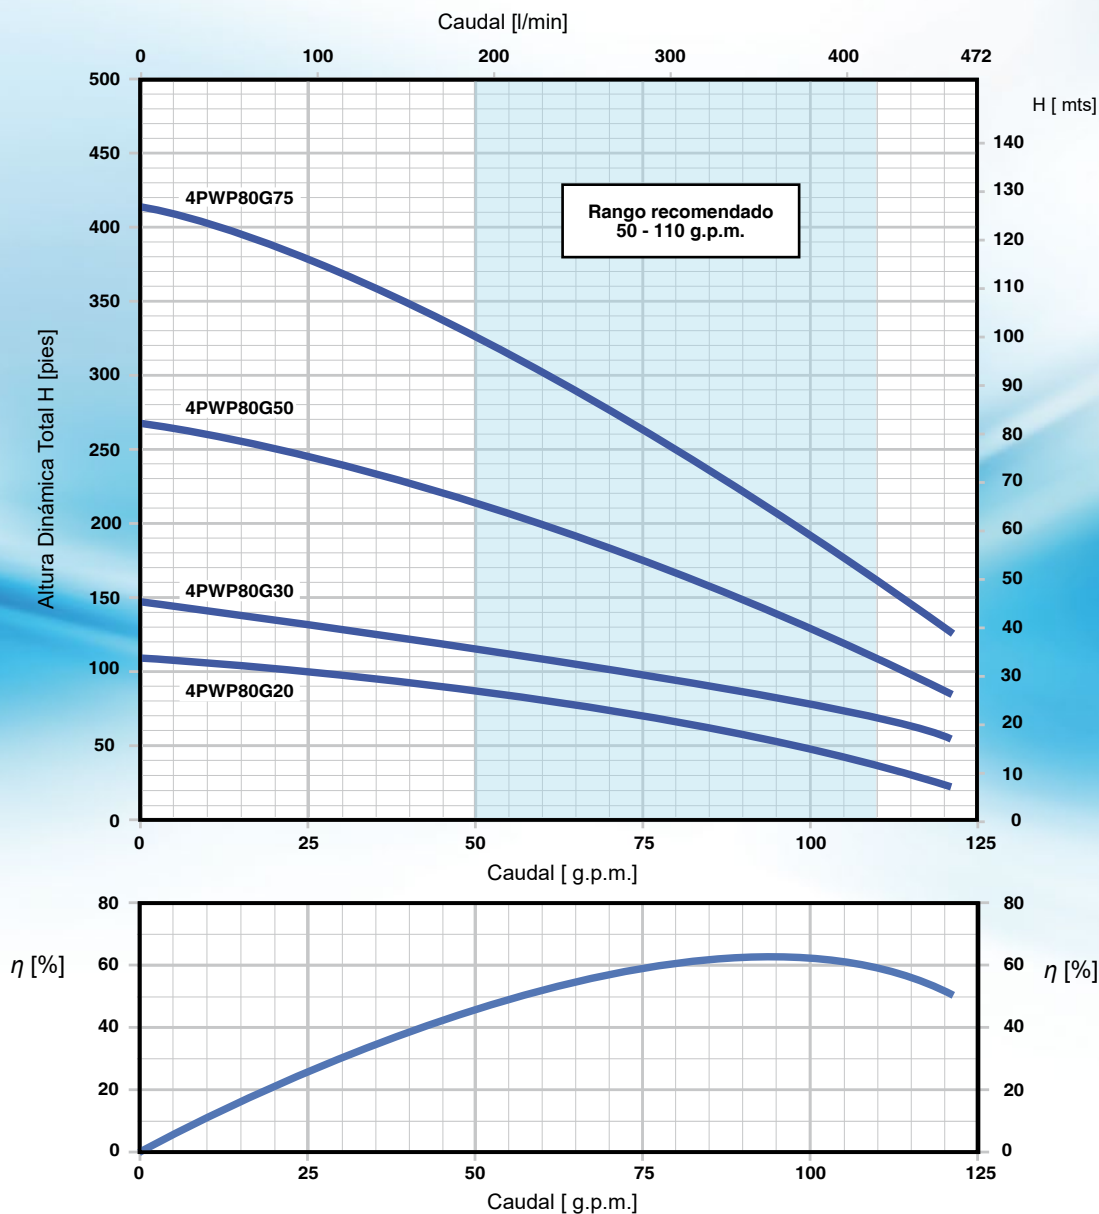


Tabla de Selección

MODELO	ETAPAS	MOTOR l/min KW HP	Q = CAUDAL																HIDRAULICA																		
			0	120	140	160	180	200	220	240	260	280	300	340	380	420	460																				
			gpm	31.7	37.0	42.3	47.6	52.9	58.2	63.5	68.8	74.1	79.4	89.9	100.5	111.1	121.7																				
			H = ALTURA DINAMICA TOTAL EN METROS / PIES																ALTURA		PESO																
		m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	mm	in	kgs	lbs								
4PWP80G20	4	1.5	2	32	104	30	100	28	92	27	90	27	88	26	85	24	80	24	78	23	75	21	70	21	68	18	60	14	45	11	35	10	32	378	14.7	3.6	8
4PWP80G30	5	2.2	3	45	148	39	128	38	125	37	121	36	118	35	115	34	112	33	108	32	105	31	102	29	95	27	89	25	82	20	66	17	56	472	18.6	4.4	9.7
4PWP80G50	9	4	5	82	269	70	230	70	230	68	223	66	216	63	207	61	200	58	197	56	187	53	173	51	167	45	148	39	128	33	108	26	85	743	29.3	6.9	15.2
4PWP80G75	14	5.5	7.5	126	413	110	361	107	351	104	341	101	331	97	318	93	305	89	292	85	279	80	262	76	249	67	220	62	203	48	157	38	125	1081	42.6	9.9	21.9

